
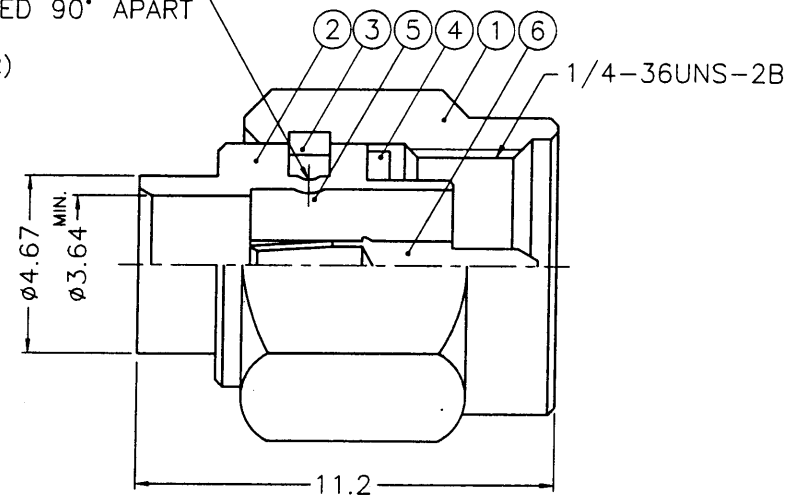


REVISIONS		
ISS	ZCNE	DESCRIPTION\PER REQUEST\DATE

業務部

STAKE IN 4 PLACES
EQUALLY SPACED 90° APART
(打四點 間隔 90°)
(SEE REMARK 1,2)

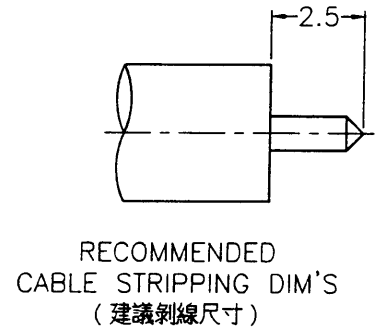

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
- BRASS PER QQ-B-626
 - GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 - BERYLLIUM COPPER PER QQ-C-530
 - GOLD PL. 50 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 - TEFLON MIL-P-19468
 - STAINLESS STEEL PER QQ-S-764, TYPE 303
 - GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER NICKEL STRIKE

- REMARK: 1. NO.5 MUST WITHSTAND A 6 lbs. MIN. PUSHOUT FORCE FROM NO.2 AFTER STAKING OPERATION
2. REMARK1 IS MAINTAINED BY STAMPING THE FOUR POINTS SHOWN ON THE DRAWING WITHOUT PUNCTURING NO.2
- (1. 打四點後零件5由零件2推出至少必須承受6磅推力)
(2. 打四點後除需符合備註1要求外且不可擊穿零件2)

出圖
2000. 8. 30

DIMENSIONS ARE IN MILLIMETERS					PART NO.		Amphenol - Kai Jack					
6	CONTACT PIN	NOTE 3	NOTE 4	1	SMA1181Z2-6-1	TAINAN TAIWAN						
5	INSULATOR	NOTE 5	NATURAL	1	SMA1181Z2-5T-50	TITLE						
4	GASKET	SILICONE	RED	1	GS-6/43X06	APPROVED	SMA SEMI-RIGID PLUG					
3	RETAINER RING	NOTE 3	NATURAL	1	SMA5000-4-B	CHECKED	(FOR .141")					
2	BODY	NOTE 1	NOTE 2	1	SMA5081-2-467/ 364-A	DRAWN	DRAWING NO.					
1	SHELL	NOTE 6	NOTE 7	1	SMA5000-1-C	DATE	KJ-SMA1181Z2-3GT50G-.141-50					
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	5/1	ISSUE	A	DATE	FILE NO.	F:\DWG\SMA\1181Z2\141-50\3GT50G