




REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE
B	A-1	NO.1 WAS CHANGED\RD-DM89042001C\04-20-00'

木務部

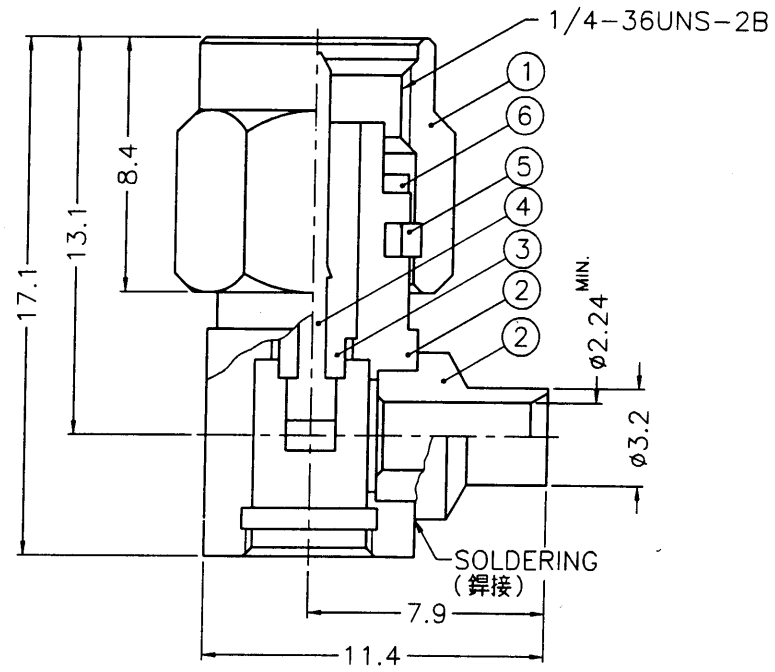

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
- BRASS PER QQ-B-626
 - GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 - BERYLLIUM COPPER PER QQ-C-530
 - GOLD PL. 50 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 - TEFLON MIL-P-19468



出圖
89.5.09
設計部

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
7	COVER	NOTE 1	NOTE 2	1	SMA1112A3-8-B
6	GASKET	SILICONE	RED	1	GS-6/43X06
5	RETAINER RING	NOTE 3	NATURAL	1	SMA5000-4-B
4	CONTACT PIN	NOTE 1	NOTE 4	1	SMA1112A4-4-B
3	INSULATOR	NOTE 5	NATURAL	1	SMA1112A3-3T-50
2	HOUSING WITH BODY	NOTE 1	NOTE 2	1	SMA1182A2-2S-32/224
1	SHELL	NOTE 1	NOTE 2	1	SMA5000-1-C

DIMENSIONS ARE IN MILLIMETERS
UNLESS OTHERWISE SPECIFIED TOLERANCES
0.5-6 = ±0.2
6-30 = ±0.4
30-120 = ±0.6
120-315 = ±1
315-1000 = ±1.6
1000-2000 = ±2.4

PART NO.	
APPROVED	DATE 05-05-00'
CHECKED	DATE 05-05-00'
DRAWN	DATE 05-05-00'

Amphenol - Kai Jack	
TAINAN TAIWAN	
TITLE	SMA R/A DIRECT SOLDER PLUG (FOR .085", .086")
DRAWING NO.	KJ-SMA1182A2-3GT50G-.085-50
FILE NO.	F:\DWG\SMA\1182A2\085-50\3GT50G

A

A

8/200