



REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE
B	A-1	NO.2 WAS CHANGED\RD-DM88070201A\07-02-99'



REMARK:1. NO.3 MUST WITHSTAND A 6 lbs. MIN. PUSHOUT FORCE FROM NO.2 AFTER STAMPING OVER OPERATION
 2. REMARK1 IS MAINTAINED BY STAMPING THE FOUR POINTS SHOWN ON THE DRAWING WITHOUT PUNCTURING NO.2
 (1. 打四點後零件3由零件2推出至少必須承受6磅推力)
 (2. 打四點後除需符合備註1要求外且不可擊穿零件2)

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
 1. BRASS PER QQ-B-626
 2. STAINLESS STEEL PER QQ-S-764, TYPE 303
 3. PASSIVATED PER QQ-P-35
 4. GOLD PL. 50 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 5. TEFLON MIL-P-19468
 6. BERYLLIUM COPPER PER QQ-C-530

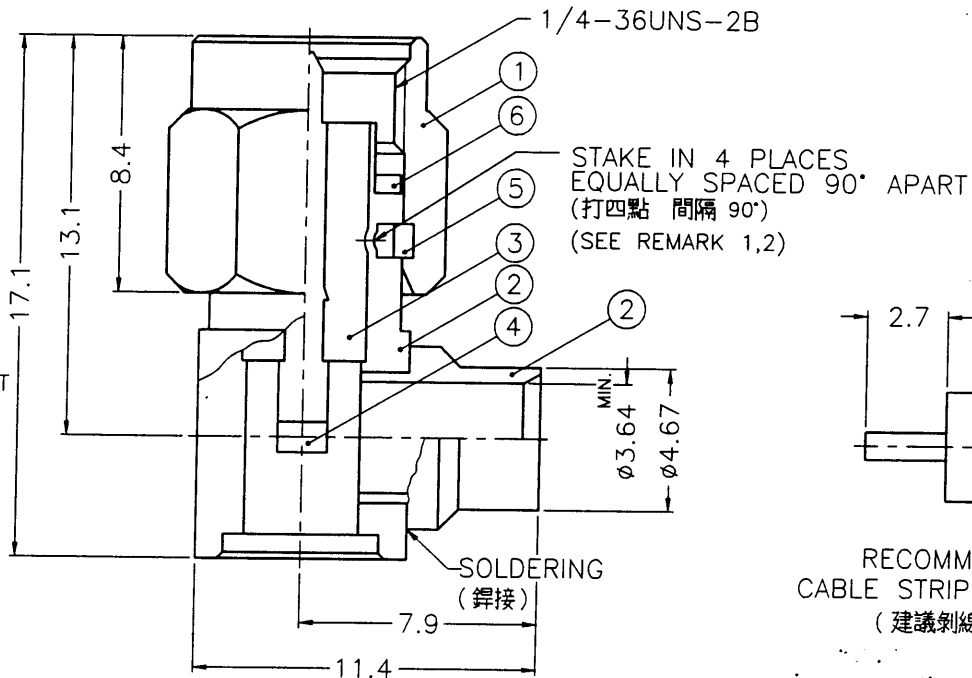

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	4/1	ISSUE	B	PART NO.	APPROVED	DATE	TITLE
7	COVER	NOTE 2	NOTE 3	1	CV-523X06-T	DIMENSIONS ARE IN MILLIMETERS				KAI JACK INDUSTRIAL CO., LTD. TAINAN TAIWAN R.O.C.	Golden DATE 07-02-99'	SMA R/A DIRECT SOLDER PLUG	
6	GASKET	SILICONE	RED	1	GS-6/43X06	UNLESS OTHERWISE SPECIFIED TOLERANCES							Golden DATE 07-02-99'
5	RETAINER RING	NOTE 6	NATURAL	1	SMA5000-4-B	0.5-6 = ±0.2							
4	CONTACT PIN	NOTE 1	NOTE 4	1	SMA5090-4	6-30 = ±0.4							
3	INSULATOR	NOTE 5	NATURAL	1	SMA5090-3T-50	30-120 = ±0.6							
2	HOUSING WITH BODY	NOTE 2	NOTE 3	1	SMA1182AA-2S -467/364-B	120-315 = ±1							
1	SHELL	NOTE 2	NOTE 3	1	SMA5000-1-B	315-1000 = ±1.6 1000-2000 = ±2.4							
										Alan DATE 07-02-99'	DRAWING NO. KJ-SMA1182AA-S/PT50G-.141-50 FILE NO. F:\DWG\SMA\1182AA\141\PT50G		