

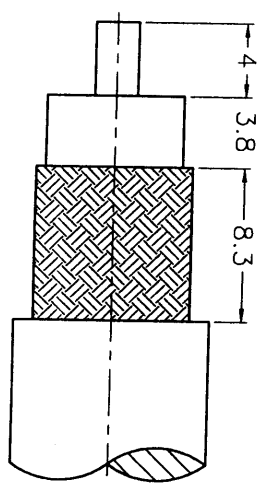
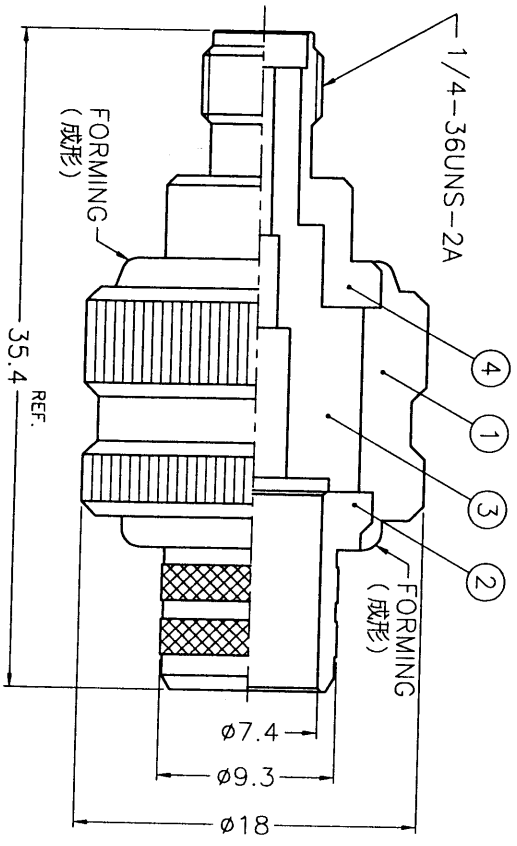


ISS	ZONE	DESCRIPTION\PER REQUEST\DATE
A1	A-1	NO.5 WAS CHANGED\N\A\01-07-02'

REVISIONS

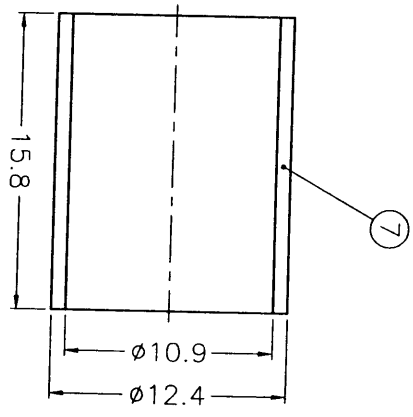

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

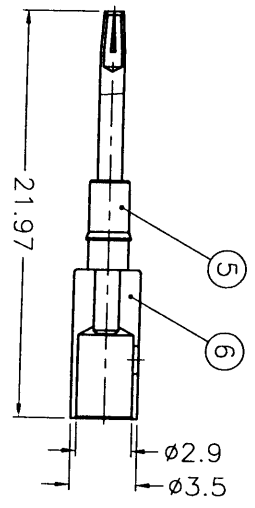

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
 2. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 3. BERYLLIUM COPPER PER QQ-C-530
 4. GOLD PL. 50 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 5. TEFLON MIL-P-19468
 6. JIS H 3250, C 2600

DIMENSIONS ARE IN MILLIMETERS

UNLESS OTHERWISE SPECIFIED TOLERANCES

0.5-6	= ±0.2
6-30	= ±0.4
30-120	= ±0.6
120-315	= ±1
315-1000	= ±1.6
1000-2000	= ±2.4

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
6	FERRULE	NOTE 6	NOTE 2	1	FR-124/109X158
5	CONTACT PIN	NOTE 3	NOTE 4	1	MB11ABU01A
4	BODY	NOTE 1	NOTE 2	1	NM-SMAF1-4
3	INSULATOR	NOTE 5	NATURAL	1	SMA1121A1-3T-50
2	BARREL	NOTE 1	NOTE 2	1	NS000-3-93/74
1	HOUSING	NOTE 1	NOTE 2	1	SMA1121A1-1

PART NO.

APPROVED

CHECKED

DRAWN

DATE

DATE

DATE

Amphenol - Kai Jack

TAINAN TAIWAN

TITLE
SMA CRIMP JACK
(FOR BELDEN 8214, 9913, 9914, LMR-400)

DRAWING NO.
KU-SMA6121A1-3GT50G-9913-50

ITEM NO. 116121AAA93GASF



1. CRIMPED FERRULE HEX. CRIMP SIZE .429"
2. CRIMPED CONTACT PIN HEX. CRIMP SIZE .118"

1 2 3 4 5 6 7 8 A B C D E F

7RD-DR 1/360 C R