
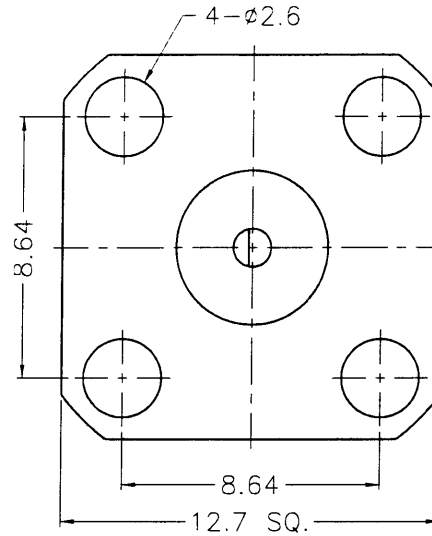


業務部

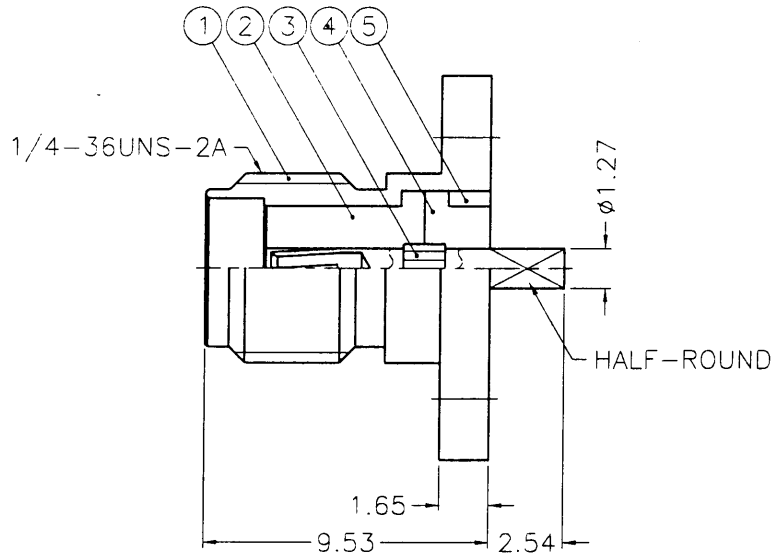

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)


1. BRASS PER QQ-B-626
2. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
3. BERYLLIUM COPPER PER QQ-C-530
4. GOLD PL. 50 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
5. TEFLON MIL-P-19468

出圖  
87.8.04  
R&D

DIMENSIONS ARE IN MILLIMETERS			
UNLESS OTHERWISE SPECIFIED TOLERANCES			
0.5-6	=	±0.2	
6-30	=	±0.4	
30-120	=	±0.6	
120-315	=	±1	
315-1000	=	±1.6	
1000-2000	=	±2.4	

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
5	RING		NOTE 1	1	SMA7530-5-B
4	INSULATOR		NOTE 5	1	SMA7530-4T-50
3	CONTACT PIN		NOTE 3	1	SMA7560-3
2	INSULATOR		NOTE 5	1	SMA7530-2T-50-B
1	BODY		NOTE 1	1	SMA7530-1-B

PART NO.	
APPROVED	<i>Mark.C</i> DATE 07-29-98'
CHECKED	<i>Mark.C</i> DATE 07-29-98'
DRAWN	<i>Staly.w</i> DATE 07-29-98'

 <b>KAI JACK INDUSTRIAL CO., LTD.</b> TAINAN TAIWAN R.O.C.	TITLE	SMA PANEL JACK
	DRAWING NO.	KJ-SMA6551G1-3GT50G-50
	FILE NO.	F:\DWG\SMA\6551G1\50\3GT50G

85MA-R1287