


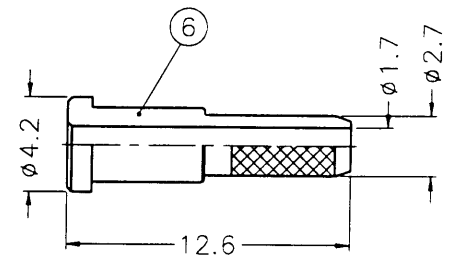




REVISIONS			
ISS	ZONE	DESCRIPTION	APPROVED\DATE
A	A-7	SMB6121G1 WAS SMB5003\TONY. T\09-24-93'	
B	A-1	NO.2 AND NO.4 WERE CHANGED\TONY. T\12-28-94'	
C	A-1	NO.4 WAS CHANGED\TONY. T\06-15-95'	
D	A-1	DRAWING NO. WERE CHANGED ON NO.4, NO.6, NO.7,	
	B-1	NO.9 AND NO.10\TONY. T\09-23-96'	




業務部



RECOMMENDED  
CABLE STRIPPING DIM'S

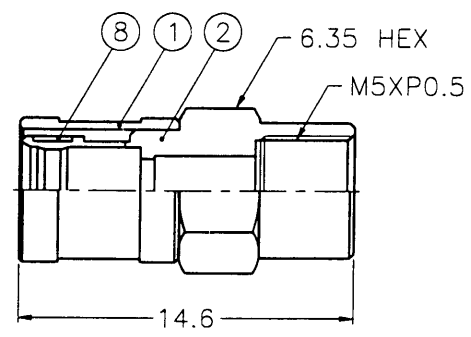

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
- BRASS PER QQ-B-626, ALLOY 360, 1/2 H
  - NICKEL PL. 100 MIN. OVER COPPER PL. 50 MIN. GOLD PL. MIN. OVER NICKEL PL. 50 MIN. OVER COPPER PL. 50 MIN.
  - BERYLLIUM COPPER PER QQ-C-530, ALLOY 173, 1/2 H
  - GOLD PL. 30 MIN. OVER NICKEL PL. 50 MIN. OVER COPPER PL. 50 MIN.
  - TEFLON MIL-P-19468

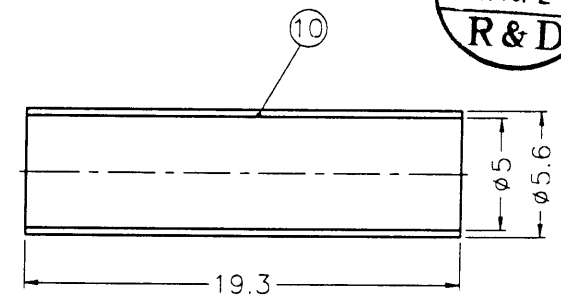

出圖  
85.10.21  
R&D

10	HEAT SHRINK TUBING			1	HT-56/5X193
9	FERRULE	NOTE 1	NOTE 2	1	FR-39/32X95
8	RETAINER RING	NOTE 3	NATURAL	1	SMB5000-6
7	HEX NUT	NOTE 1	NOTE 2	1	SMB5003-7-55/33
6	BARREL	NOTE 1	NOTE 2	1	SMB5003-6-27/17
5	INSULATOR	NOTE 5	NATURAL	1	SMB5003-5
4	CONTACT PIN	NOTE 3	NOTE 4	1	SMB5003-4-135/06-B
3	INSULATOR	NOTE 5	NATURAL	1	SMB5003-3T-50
2	BODY	NOTE 1	NOTE 2	1	SMB5003-2-A
1	SHELL	NOTE 1	NOTE 2	1	SMB5000-1
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS				PART NO.	
UNLESS OTHERWISE SPECIFIED TOLERANCES				APPROVED <i>Tommy J</i> DATE 10-12-96'	
0.5-6 = ±0.2				CHECKED <i>Golden W</i> DATE 10-12-96'	
6-30 = ±0.4				DRAWN <i>Skaly W</i> DATE 10-12-96'	
30-120 = ±0.6					
120-315 = ±1					
315-1000 = ±1.6					
1000-2000 = ±2.4					
SCALE	3/1	ISSUE	D		

KAI JACK INDUSTRIAL CO., LTD. TAINAN TAIWAN R.O.C.	
TITLE	SMB CRIMP PLUG (FOR RG-174/U,188A/U,316/U)
DRAWING NO.	KJ-SMB6121G1-316U-50
FILE NO.	F:\DWG\SMB\6121G1\316-50