





1	2	3	4	5	6	7	8
ISS	ZONE	REVISIONS					
		DESCRIPTION \ PER REQUEST \ DATE					



RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

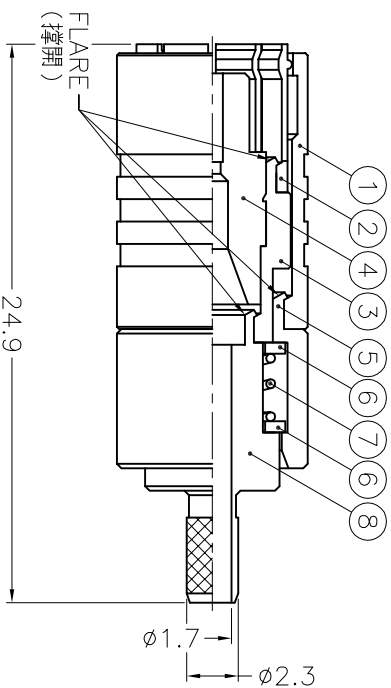

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
3. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
4. BERYLLIUM COPPER PER QQ-C-530
5. TEFLON MIL-P-19468

1. CRIMPED FERRULE
HEX. CRIMP SIZE ".128"
2. CRIMPED CONTACT PIN
SQ. CRIMP SIZE 0.9mm

10	FERRULE	COPPER	NOTE 2	1	FR00AAE37A
9	CONTACT PIN	NOTE 4	NOTE 3	1	CP26AAT01A
8	BARREL	NOTE 1	NOTE 2	1	BR00ALC01A
7	SPPING	SWP 80	NATURAL	1	SMZ6121L2-7
6	RETAINER RING	NOTE 4	NATURAL	2	SMZ6121L2-6
5	HOUSING	NOTE 1	NOTE 2	1	SMZ6121L2-5
4	INSULATOR	NOTE 5	NATURAL	1	SMZ6121L2-4T-75
3	BODY	NOTE 1	NOTE 2	1	SMZ6121L2-3
2	OUTER CONTACT	NOTE 4	NOTE 3	1	SMZ6121L2-2
1	SHELL	NOTE 1	NOTE 2	1	SMZ6121L2-1

DIMENSIONS ARE IN MILLIMETERS
UNLESS OTHERWISE SPECIFIED
TOLERANCES
0.5-6 = ±0.2
6-30 = ±0.4
30-120 = ±0.6
120-315 = ±1
315-1000 = ±1.6
1000-2000 = ±2.4

PART NO.		DATE
APPROVED		11-13-02
CHECKED		11-13-02
DRAWN	KEN	11-13-02

Danbury, CT, USA - Taiwan - Shenzhen, China	
Amphenol	
TITLE SMZ POSITION LOCK CRIMP PLUG (FOR RG-179/U, 187A/U CABLE)	
DRAWING NO.	KJ-SMZ6121L2-N/3GT3G-179U-75
ITEM NO.	266121AAD19NF7F

1 2 3 4 5 6 7 8