





1 2 3 4 5 6 7 8

REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE
B	A-3	NO.1 AND NO.5 WERE CHANGED\RD-DM91100901\10-09-02'

SALES

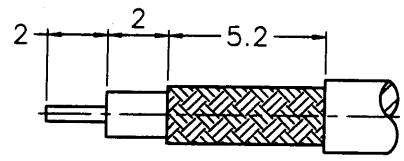

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

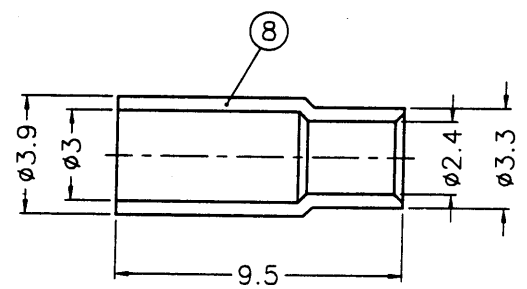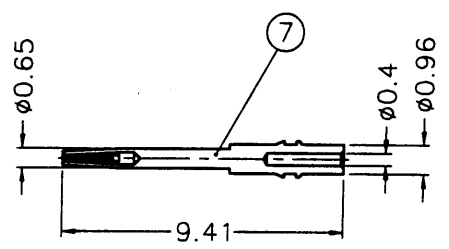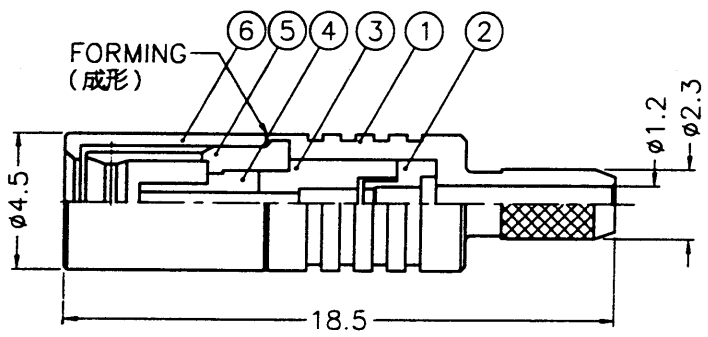

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
- BRASS PER QQ-B-626
 - GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 - GOLD PL. 30 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 - TEFLON MIL-P-19468
 - BERYLLIUM COPPER PER QQ-C-530

ISSUED
2002.10.11
R&D

- CRIMPED FERRULE
HEX CRIMP SIZE .128"
- CRIMPED CONTACT PIN TO SOLDER

8	FERRULE	COPPER	NOTE 2	1	FR-39/3-33/24 X95-B
7	CONTACT PIN		NOTE 5	NOTE 3	1 CP15AAC02A
6	SHELL		NOTE 1	NOTE 2	1 SSMB-SHELL-1
5	OUT CONTACT		NOTE 5	NOTE 2	1 TC15AAA01A
4	INSULATOR		NOTE 4	NATURAL	1 SSMB6121A1-2T-50-B
3	INSULATOR		NOTE 4	NATURAL	1 SSMB6121A1-3T-50
2	INSULATOR		NOTE 4	NATURAL	1 SSMB1121A1-3T-50
1	BODY		NOTE 1	NOTE 2	1 BD00AQS02A

DIMENSIONS ARE IN MILLIMETERS			PART NO.	
UNLESS OTHERWISE SPECIFIED TOLERANCES			APPROVED	DATE
0.5-6	= ±0.2		<i>Loae, J</i>	10-09-02'
6-30	= ±0.4		CHECKED	DATE
30-120	= ±0.6		<i>Loae, J</i>	10-09-02'
120-315	= ±1		DRAWN	DATE
315-1000	= ±1.6		<i>Jay</i>	10-09-02'
1000-2000	= ±2.4			
SCALE	4/1	ISSUE	B	FILE NO. F:\DWG\SSMB\6121A1\196AU-50\3GT30G

Amphenol - Kai Jack	
TAINAN TAIWAN	
TITLE	SSMB CRIMP PLUG (FOR RG-178B/U, 196A/U CABLE)
DRAWING NO.	KJ-SSMB6121A1-3GT30G-196AU-50
ITEM NO.	156121AAA16GE5F

7RD-DR 15619 8

1 2 3 4 5 6