




REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE

**SALES**

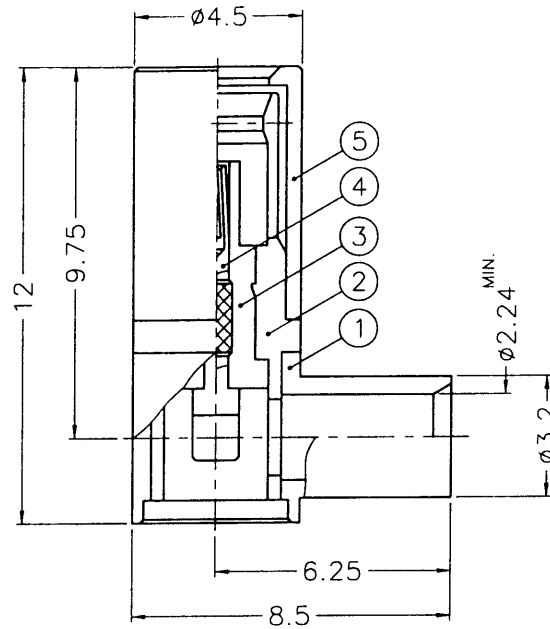

ISSUED  
2003. 9. 24  
TND



NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

- 1. BRASS PER QQ-B-626
- 2. BRASS PER QQ-B-613
- 3. BERYLLIUM COPPER PER QQ-C-530
- 4. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
- 5. GOLD PL. 30 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
- 6. TEFLON MIL-P-19468

DIMENSIONS ARE IN MILLIMETERS					PART NO.						
6	COVER	NOTE 2	NOTE 4	1	CV-4X05-T	UNLESS OTHERWISE SPECIFIED TOLERANCES 0.5-6 = ±0.2 6-30 = ±0.4 30-120 = ±0.6 120-315 = ±1 315-1000 = ±1.6 1000-2000 = ±2.4			APPROVED	DATE	<b>Amphenol - Kai Jack</b> TAINAN TAIWAN TITLE SSMB R/A DIRECT SOLDER PLUG (FOR .085", .086") DRAWING NO. SSMB6182A1-3GT30G-.085-50 ITEM NO. 156182AAA45GE5F
5	SHELL	NOTE 1	NOTE 4	1	SSMB-SHELL-1				lead, 2	09-23-03'	
4	CONTACT PIN	NOTE 3	NOTE 5	1	SSMB6112A1-4-B				lead, 2	09-23-03'	
3	INSULATOR	NOTE 6	NATURAL	1	SSMB6112A1-3				DATE	09-23-03'	
2	BODY	NOTE 3	NOTE 4	1	SSMB6112A1-2				DATE	09-23-03'	
1	HOUSING	NOTE 1	NOTE 4	1	HS00ALB01A				DATE	09-23-03'	
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	5/1	ISSUE	A	FILE NO.	F:\DWG\SSMB\6182A1\085\50\3GT30G