


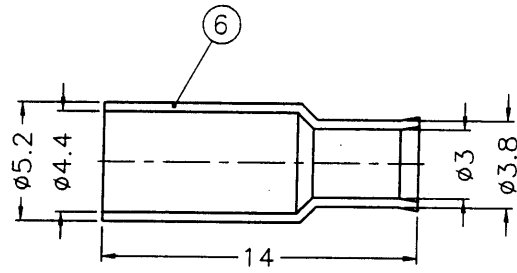
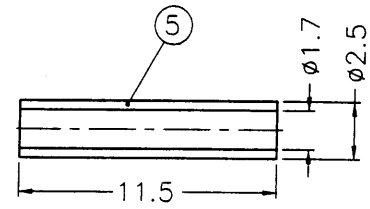


REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE

業務部

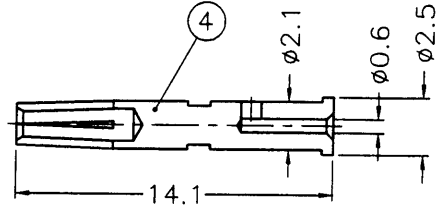

RECOMMENDED  
CABLE STRIPPING DIM'S  
(建議剝線尺寸)

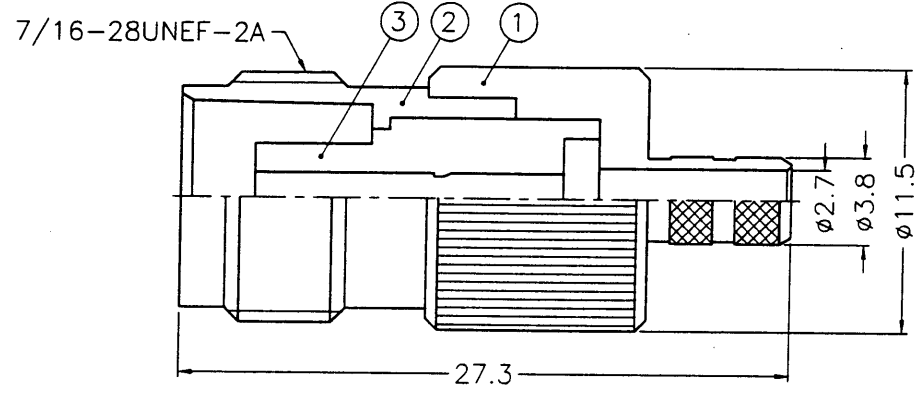

出圖  
2000.12.13  
設計部

1. CRIMPED FERRULE  
HEX CRIMP SIZE .178"
2. CRIMPED CONTACT PIN  
HEX CRIMP SIZE .068"

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)  
 1. BRASS PER QQ-B-626  
 2. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE  
 3. PHOSPHOR BRONZE PER QQ-B-750  
 4. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE  
 5. JIS H 3260, C 3501

DIMENSIONS ARE IN MILLIMETERS					PART NO.		Amphenol - Kai Jack		
UNLESS OTHERWISE SPECIFIED TOLERANCES					APPROVED		TAINAN TAIWAN		
6	FERRULE	NOTE 5	NOTE 2	1	FR-52/44-38/3 X14	A. W. C.	DATE	TITLE	
5	SLEEVE	DELTRIN	NATURAL	1	SL-25/17X115		12-12-00'		TNC CRIMP JACK
4	CONTACT PIN	NOTE 3	NOTE 4	1	B74000-8-25/06	Andy. C	DATE	(FOR RG-174/U, 188A/U, 316/U)	
3	INSULATOR	DELTRIN	NATURAL	1	B74050-3-50-B		12-12-00'	DRAWING NO.	
2	BODY	NOTE 1	NOTE 2	1	T74000-2	D. S. L.	DATE	KJ-T6121E1-ND3G-316U-50	
1	HOUSING	NOTE 1	NOTE 2	1	B70002-1-38/27		12-12-00'	FILE NO.	
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	3/1	ISSUE	A