REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE

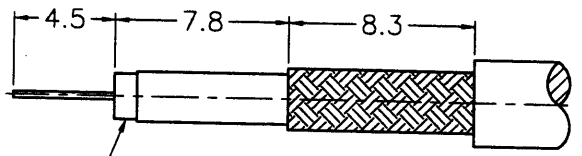

REMOVE FOIL 1mm MIN.
(去除箔襯 1mm 以上)

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

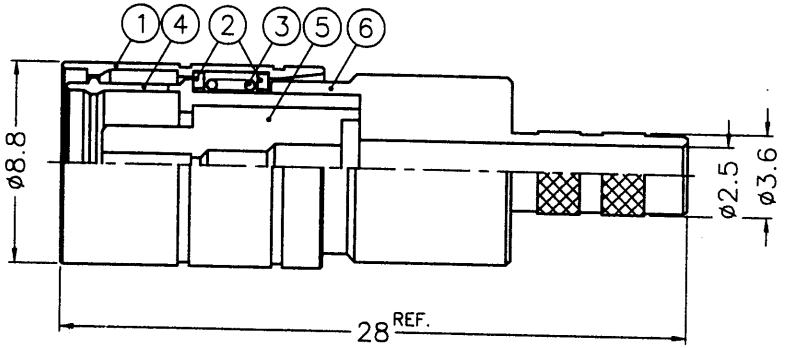





NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
2. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
3. GOLD PL. 10 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
4. BERYLLIUM COPPER PER QQ-C-530
5. PHOSPHOR BRONZE PER QQ-B-750
6. GOLD PL. 30 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
7. TEFLON MIL-P-19468
8. JIS H 3250, C 2700

REF.
2001.12.05
R&D

1. CRIMPED FERRULE
   HEX. CRIMP SIZE .178"
2. CONTACT PIN TO SOLDER OR
   USE DMC-MH800(GB109) CRIMP TOOL
3. SOCKET UHDC43/5FS
4. CABLES: -BT3002
   -TZC75024
   -0.3/1.95/3.55

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
9	POSITIONER	DELRIN	NATURAL	0.05	PT00AAA01A
8	FERRULE	NOTE 8	NOTE 2	1	FR00ABF02A
7	CONTACT PIN	NOTE 4	NOTE 6	1	CP43AAC01A
6	BARREL	NOTE 1	NOTE 2	1	BR00ADH05A
5	INSULATOR	NOTE 7	NATURAL	1	NS43AAA01A
4	BODY	NOTE 5	NOTE 3	1	BD43AAA01A
3	SPRING	SUS 304	NATURAL	1	SG00AAF01A
2	SNAP RING	NOTE 4	NATURAL	2	SN00AAB01A
1	SHELL	NOTE 1	NOTE 2	1	SH45AAA01A

DIMENSIONS ARE IN MILLIMETERS
UNLESS OTHERWISE SPECIFIED TOLERANCES
0.5-6 = ±0.2
6-30 = ±0.4
30-120 = ±0.6
120-315 = ±1
315-1000 = ±1.6
1000-2000 = ±2.4

SCALE 3/1 ISSUE 1

PART NO.

APPROVED Jacky DATE 12-03-01'

CHECKED Jacky DATE 12-03-01'

DRAWN JACKY DATE 12-03-01'

FILE NO. F:\DWG\U43\6121B2\3002-75\N10GT30G

Amphenol - Kai Jack
TAINAN TAIWAN

TITLE
UHDC43 POSITION LOCK CRIMP SOCKET

DRAWING NO.
KJ-U436121B2-N/10GT30G-3002-75

ITEM NO. 456121AAA32LH7F