

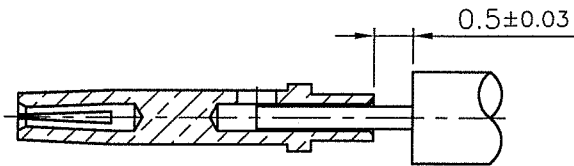



ISS		SYMBOL		REVISIONS	
				DESCRIPTION\DATE	

FOR CUSTOMER(WEB)

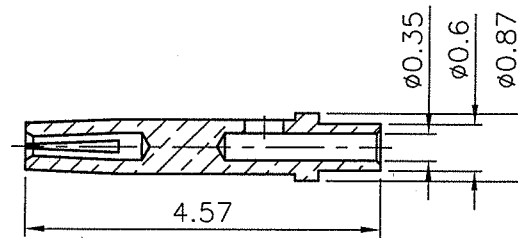

CONTACT PIN ASSEMBLY  
(中心針組裝)

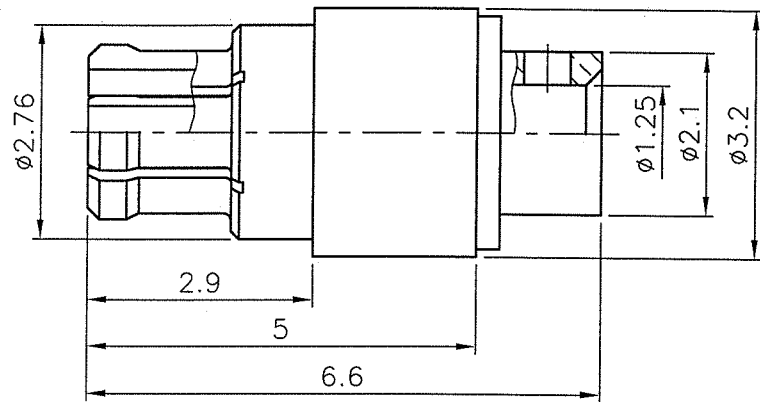

RECOMMENDED  
CABLE STRIPPING DIM'S  
(建議剝線尺寸)



- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BERYLLIUM COPPER PER QQ-C-530
  2. GOLD PL 5 MIN OVER ELECTROLESS NICKEL PL 50 MIN THICK OVER COPPER PL 50 MIN THICK
  3. TEFLON MIL-P-19468
  4. BRASS PER QQ-B-626

RoHS COMPLIANT

					DIMENSIONS ARE IN MILLIMETERS				PART NO.		BO-JIANG 帛江科技股份有限公司 BO-JIANG TECHNOLOGY CO., LTD.	
					UNLESS OTHERWISE SPECIFIED TOLERANCES (一般公差)				APPROVED	DATE	TITLE	
					0.5~6 = ±0.2				<i>Jany</i>	01/16/12'	SMPM DIRECT SOLDER JACK (FOR .047")	
					>6~30 = ±0.4						DRAWING NO. 5562NS527GD001B	
					>30~120 = ±0.6				CHECKED	DATE	FILE NO. Z:\NND\5562\NS\527\001\5562NS527GD001B-A3	
					>120~315 = ±1				<i>Jany</i>	01/16/12'		
					>315~1000 = ±1.6				DRAWN	DATE		
					ANGLES(角度) = ±5'				<i>Jany</i>	01/16/12'		
CONTACT PIN	NOTE 1	NOTE 2										
BRAID HOLDER	NOTE 4	NOTE 2										
INSULATOR	NOTE 3	WHITE										
BODY	NOTE 1	NOTE 2										
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	10/1	ISSUE	A3			