


SALES

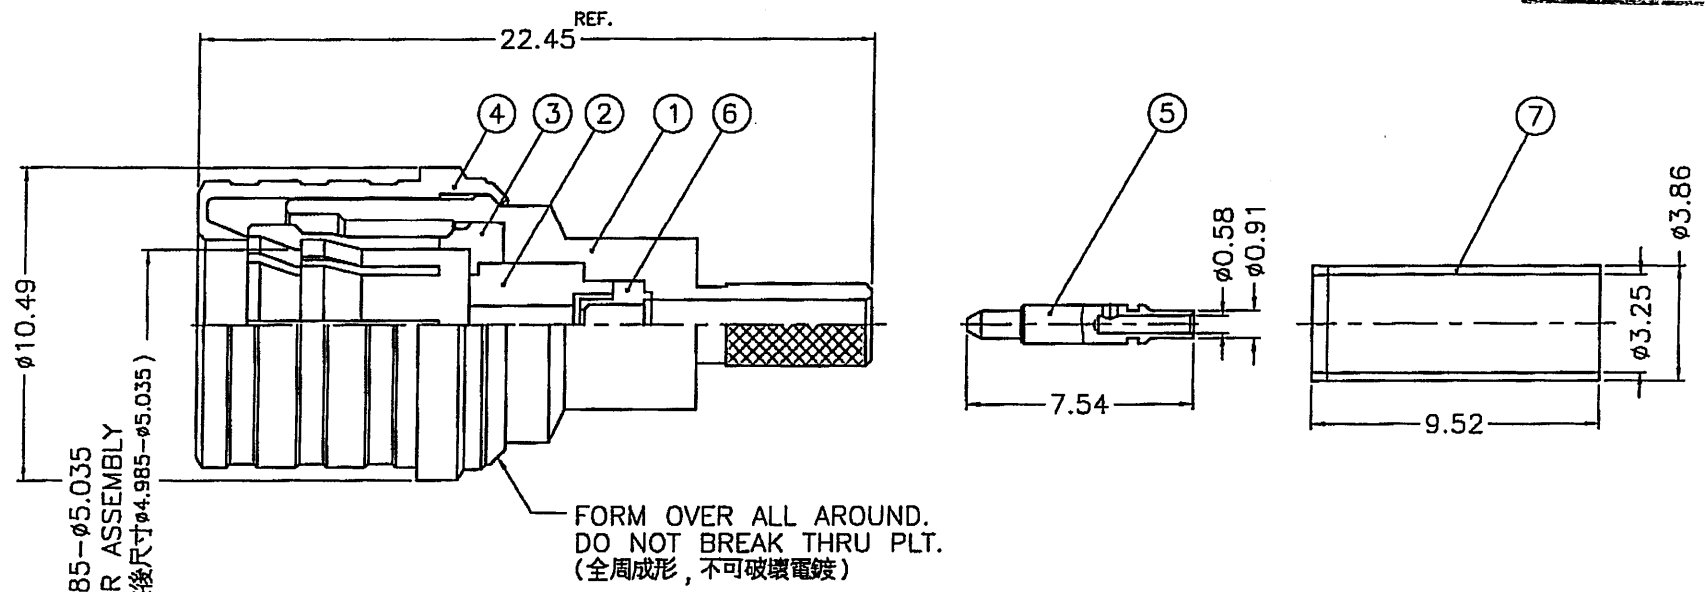

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
 1. BRASS PER QQ-B-626
 2. WHITE BRONZE (PS2) OR B05
 3. GOLD PL. 30 MIN. THICK OVER ALBALOY PLATING (COPPER-TIN-ZINC) PL. 80 MIN. THICK
 4. ALBALOY PLATING (COPPER-TIN-ZINC) PL. 80 MIN. THICK
 5. TEFLON MIL-P-19468

REMARK: 1. NO:4 MUST BE FREE TURNING AND MUST BE CAPABLE OF WITHSTANDING A PULL-OFF FORCE OF 30 LBS. MIN. AFTER FORMING
 (NO.4 成形後可自由轉動且至少需承受 30 LBS.的拉力)

18-80
 2004 8.20
 R&D

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
7	FERRULE	COPPER	NOTE 4	1	31-1357-3
6	INSULATOR	NOTE 5	NATURAL	1	930-10064
5	CONTACT PIN	NOTE 1	NOTE 3	1	930-10062
4	SLEEVE	NOTE 1	NOTE 4	1	930-10004
3	OUTER CONTACT	NOTE 2	NOTE 4	1	930-10003
2	INSULATOR	NOTE 5	NATURAL	1	930-10063
1	BODY	NOTE 1	NOTE 4	1	930-10061

DIMENSIONS ARE IN MILLIMETERS			
UNLESS OTHERWISE SPECIFIED TOLERANCES			
0.5-6	=	±0.2	
6-30	=	±0.4	
30-120	=	±0.6	
120-315	=	±1	
315-1000	=	±1.6	
1000-2000	=	±2.4	
SCALE	4/1	ISSUE	A

PART NO.	
APPROVED	DATE 08/18/04
CHECKED <i>Jerry/en</i>	DATE 08-18-04
DRAWN <i>Jerry</i>	DATE 08-18-04
FILE NO. F:\DWG\CNPD\930\129P\51SSZ	

Amphenol	
Danbury, CT, USA - Tainan, Taiwan - Shenzhen, China	
TITLE	QMA 50 OHM PLUG FOR RG-316 TYPE CABLE
DRAWING NO.	930-129P-51S
ITEM NO.	930-129P-51S

7 RD-DR ~~5689~~ 8-2687