

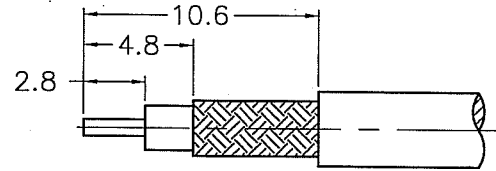
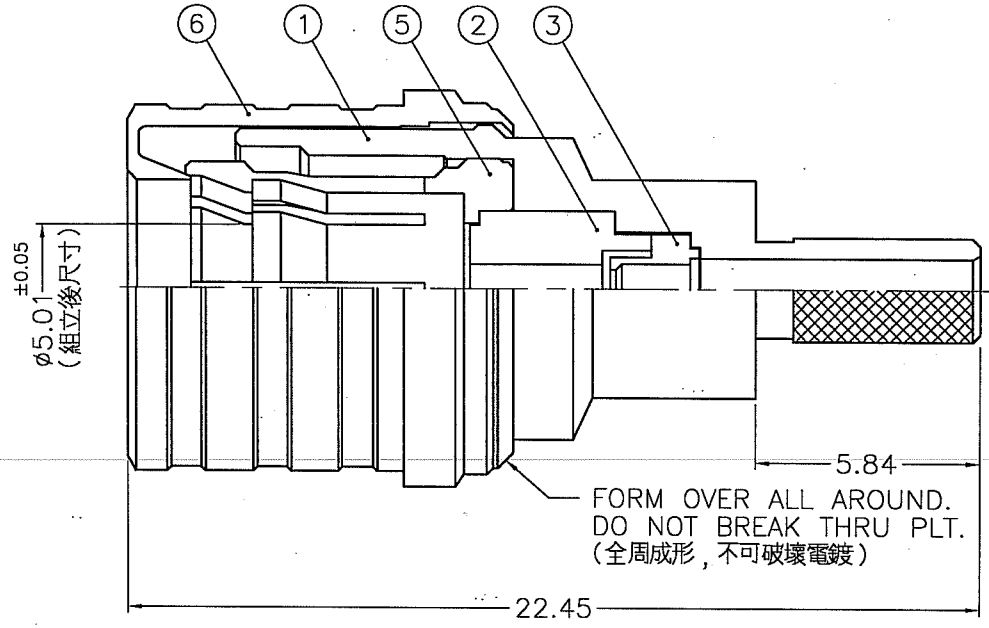


REVISIONS			
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE	
A1	C-3	FORMING PLACE WAS CHANGED\N/A\08-26-04'	
B	A-3	NO.5 WAS CHANGED\RD-DM06072801C\08-14-06'	
C	A-3	NO.6 WAS CHANGED\RD-DM06121501J\12-19-06'	
D	A-3	NO.6 WAS CHANGED\RD-DM07060601K\06-16-07'	

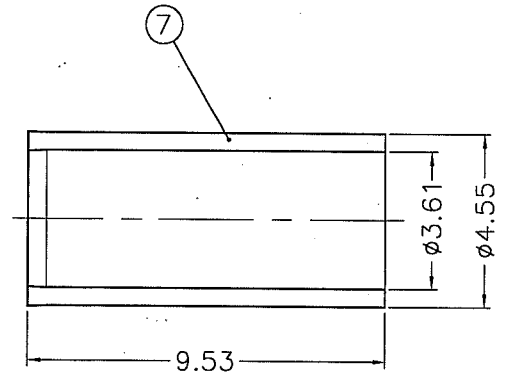

RECOMMENDED  
CABLE STRIPPING DIM'S  
(建議剝線尺寸)

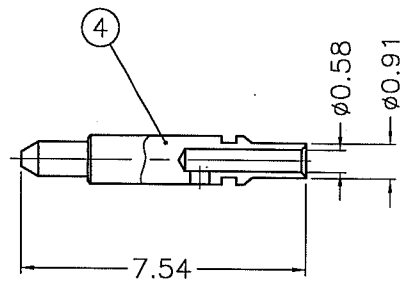

FORM OVER ALL AROUND.  
DO NOT BREAK THRU PLT.  
(全周成形, 不可破壞電鍍)

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
- BRASS PER QQ-B-626
  - PHOSPHOR BRONZE PER QQ-B-750
  - ALBALOY PLATING(COPPER-TIN-ZINC)PL. 80 MIN. THICK
  - GOLD PL. 30 MIN. THICK OVER ALBALOY PLATING (COPPER-TIN-ZINC) PL. 80 MIN. THICK
  - TEFLON MIL-P-19468

REMARK: 1. NO.1 MUST BE FREE TURNING AND MUST BE CAPABLE OF WITHSTANDING A PULL-OFF FORCE OF 30 LBS. MIN. AFTER FORMING (NO.1成形後可自由轉動和移動且至少需承受30 LBS.的拉力)

2. CRIMP FERRULE TOOL .151"

DIMENSIONS ARE IN MILLIMETERS					PART NO.		<h3>Amphenol</h3> Danbury,CT,USA-Tainan,Taiwan-Shenzhen,China				
UNLESS OTHERWISE SPECIFIED TOLERANCES					APPROVED	DATE			TITLE		
7	FERRULE	COPPER	NOTE 3	1	31-1357-8	Angela W. Assy	06-16-07'	QMA 50 OHM PLUG, FOR RD-316 CABLE			
6	SLEEVE	NOTE 1	NOTE 3	1	930-10004		DATE		06-16-07'		
5	OUTER CONTACT	NOTE 2	NOTE 3	1	930-10003#B	Korte	DATE	DRAWING NO. 930-115P-51S			
4	CONTACT	NOTE 1	NOTE 4	1	930-10062		DATE		06-16-07'		
3	INSULATOR	NOTE 5	NATURAL	1	930-10064	DATE	06-16-07'	ITEM NO. 930-115P-51S			
2	INSULATOR	NOTE 5	NATURAL	1	930-10063						
1	BODY	NOTE 1	NOTE 3	1	930-10061						
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	5/1	ISSUE	D	FILE NO.	F:\DWG\CNPD\930\115P\51S-DSZ