

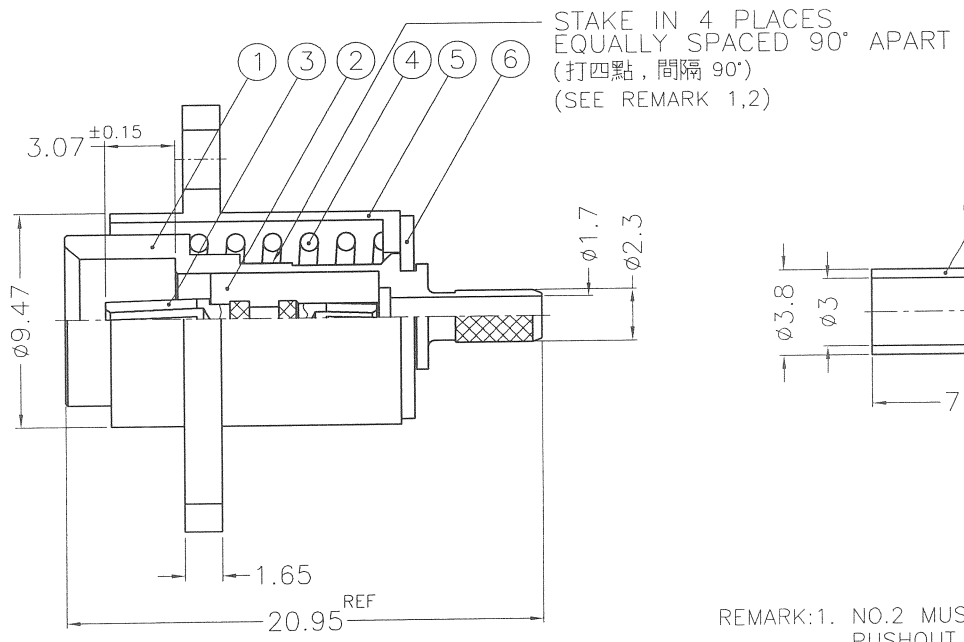
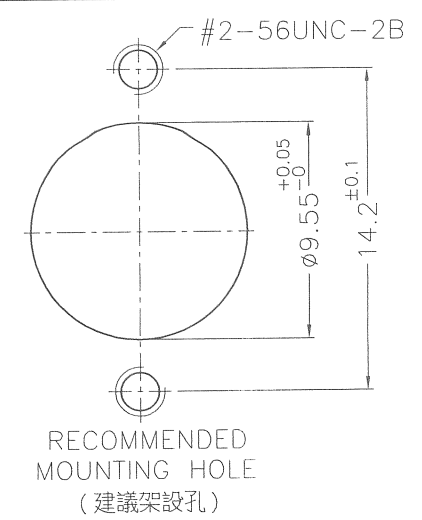
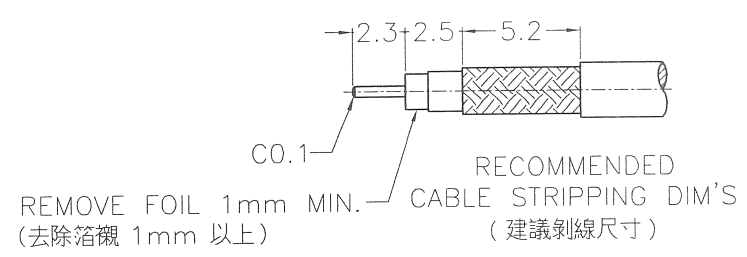


REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE

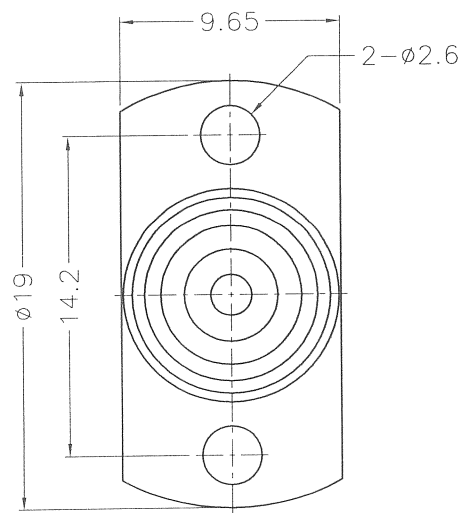

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
 2. STAINLESS STEEL PER QQ-S-764, TYPE 303
 3. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 4. PHOSPHOR BRONZE PER QQ-B-750
 5. GOLD PL. 30 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 6. TEFLON MIL-P-19468

1. CRIMPED FERRULE
HEX CRIMP SIZE .128"

- REMARK: 1. NO.2 MUST WITHSTAND A 6 lbs. MIN. PUSHOUT FORCE FROM NO.1 AFTER STAKING OPERATION
2. REMARK 1 IS MAINTAINED BY STAMPING THE FOUR POINTS SHOWN ON THE DRAWING WITHOUT PUNCTURING NO.1
- (1. 打四點後零件 2 由零件 1 推出至少必須承受 6 磅推力)
(2. 打四點後除需符合備註 1 要求外, 且不可擊穿零件 1)

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
7	FERRULE	COPPER	NOTE 3	1	FR-38/3X7C
6	LOCK RING	NOTE 2	NATURAL	1	LRO0ABE01A
5	HOUSING	NOTE 1	NOTE 3	1	HS00AMY01A
4	SPRING	SWP 80	NATURAL	1	SG00AAM05A
3	CONTACT PIN	NOTE 4	NOTE 5	1	CP30AAJ02A
2	INSULATOR	NOTE 6	NATURAL	1	NS00AYY02A
1	BODY	NOTE 1	NOTE 3	1	BD30AAK01A

DIMENSIONS ARE IN MILLIMETERS				PART NO.	
UNLESS OTHERWISE SPECIFIED TOLERANCES 0.5-6 = ±0.2 6-30 = ±0.4 30-120 = ±0.6 120-315 = ±1 315-1000 = ±1.6 1000-2000 = ±2.4				APPROVED	DATE
				CHECKED	DATE
				DRAWN	DATE
				FILE NO. F:	BMA\6511A1\LMR100\50\NT30GSZ

Amphenol	
Danbury, CT, USA - Tainan, Taiwan - Shenzhen, China	
TITLE	BMA PANEL CRIMP JACK (FOR LMR-100A CABLE)
DRAWING NO.	BMA6511A1-NT30G-LMR100-50
ITEM NO.	306511AAAA1NC5F