
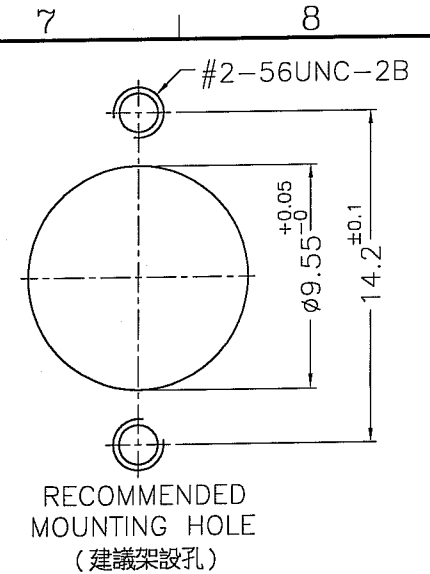
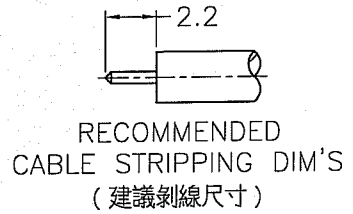
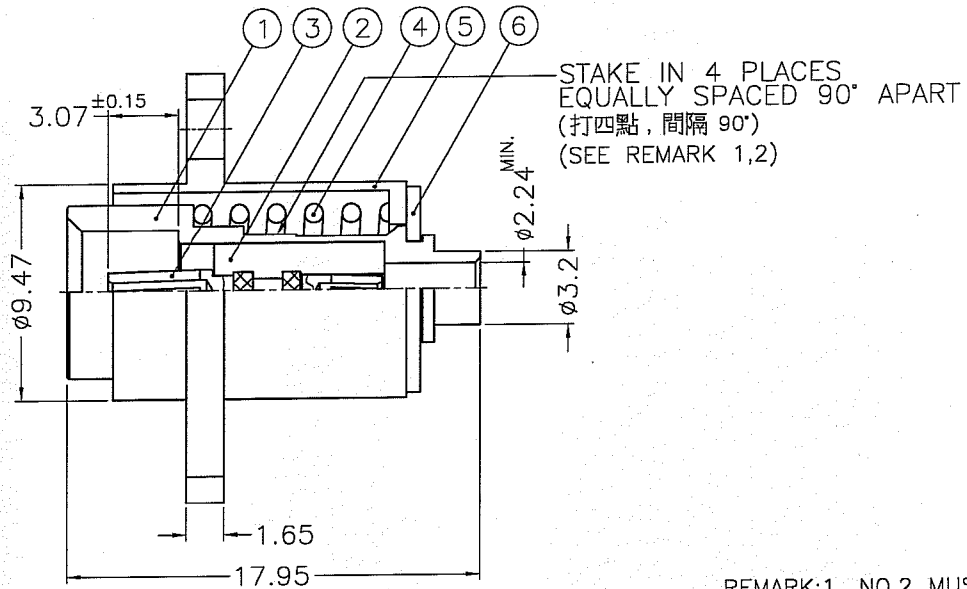


REVISIONS			
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE	

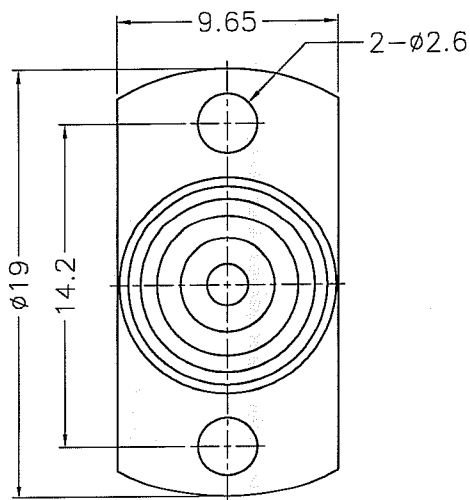

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. STAINLESS STEEL PER QQ-S-764, TYPE 303
3. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
4. PHOSPHOR BRONZE PER QQ-B-750
5. GOLD PL. 30 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
6. TEFLON MIL-P-19468

- REMARK: 1. NO.2 MUST WITHSTAND A 6 lbs. MIN. PUSHOUT FORCE FROM NO.1 AFTER STAKING OPERATION
2. REMARK 1 IS MAINTAINED BY STAMPING THE FOUR POINTS SHOWN ON THE DRAWING WITHOUT PUNCTURING NO.1
- (1. 打四點後零件2由零件1推出至少必須承受6磅推力)
- (2. 打四點後除需符合備註1要求外，且不可擊穿零件1)

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
6	LOCK RING	NOTE 2	NATURAL	1	LR00ABE01A
5	HOUSING	NOTE 1	NOTE 3	1	HS00AMY01A
4	SPRING	SWP 80	NATURAL	1	SG00AAM05A
3	CONTACT PIN	NOTE 4	NOTE 5	1	CP30AAJ01A
2	INSULATOR	NOTE 6	NATURAL	1	NS00AYY02A
1	BODY	NOTE 1	NOTE 3	1	BD30AAE01A

DIMENSIONS ARE IN MILLIMETERS				PART NO.	
UNLESS OTHERWISE SPECIFIED TOLERANCES				APPROVED	DATE
0.5-6 = ±0.2				<i>Sooty H</i>	01-28-05'
6-30 = ±0.4				CHECKED	DATE
30-120 = ±0.6				<i>Sooty H</i>	01-28-05'
120-315 = ±1				DRAWN	DATE
315-1000 = ±1.6				<i>Gree</i>	01-28-05'
1000-2000 = ±2.4				FILE NO. F:\DWG\BMA\6581A1\085-50\NT30G-A1SZ	

Amphenol	
Danbury, CT, USA - Tainan, Taiwan - Shenzhen, China	
TITLE BMA PANEL DIRECT SOLDER JACK (FOR .085 , .086 CABLE)	
DRAWING NO. BMA6581A1-NT30G-.085-50	
ITEM NO. 306581AAA45NC5F	