

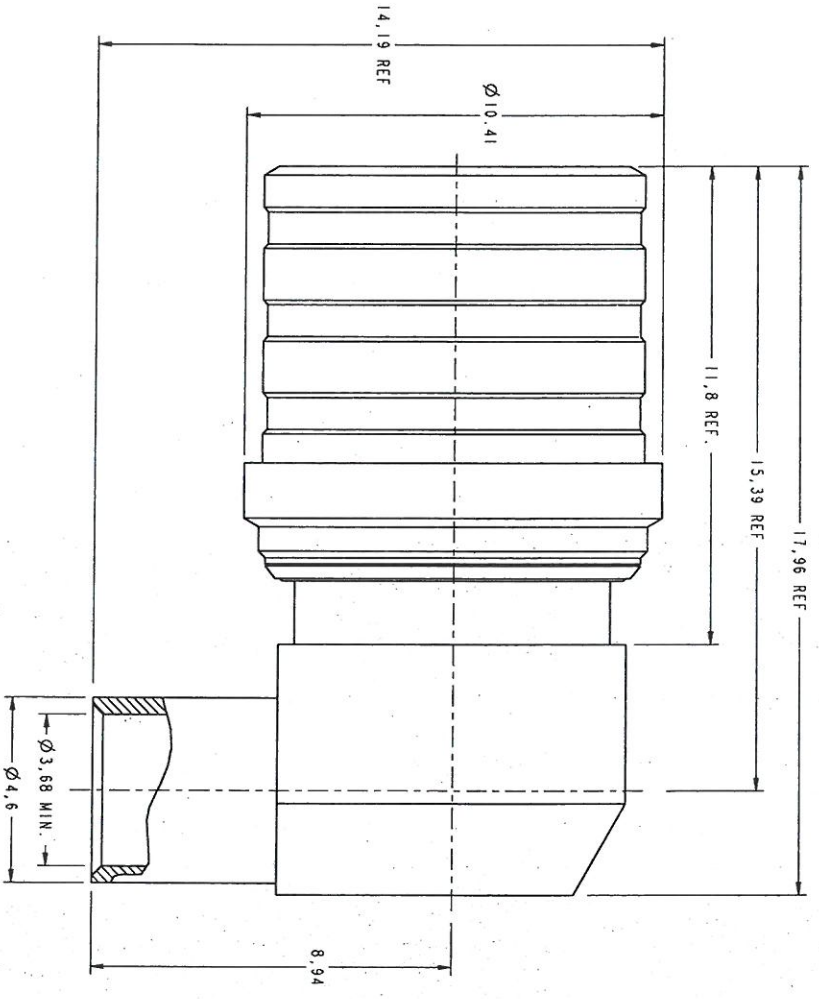


REV	DESCRIPTION	DATE	ECO	APPR
A	RELEASE TO MFG.	08-May-09	-----	EDWARD

THIRD ANGLE PROJ.

REVISIONS

- NOTES:
- MATERIALS AND FINISHES/PLATING THICKNESS (IN MICRO-INCHES):
 BODY - BRASS, ALBALOY PLATING
 CONTACT PIN - BRASS, GOLD PLATING
 INSULATOR - PTFE, NATURAL
 - ELECTRICAL:
 A. IMPEDANCE: 50 OHM
 B. FREQUENCY RANGE: 0-6 GHz
 C. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS, MIN.
 - MECHANICAL:
 A. DURABILITY: 100 CYCLES MIN.
 B. TEMPERATURE RANGE: -65°C to +165°C
 - CONTACT PIN TO SOLDER

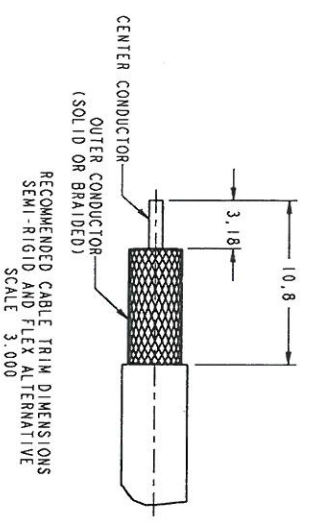

SCALE 3.000

CUSTOMER OUTLINE DRAWING
 ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:
 0.5 - 6mm ±0.1mm
 6 - 30mm ±0.2mm
 30 - 120mm ±0.3mm
 ANGLES ±1°

MATERIAL

DRAWN: Edward
 ENGINEER: David
 DATE: 08-May-09

TITLE
 QMA 50 OHM R/A
 PLUG FOR .141 CABLE

Amphenol RF
 Danbury CT USA, Toicon, Toicon, Shenzhen, China
 WWW.AMPHENOLRF.COM

REFERENCE
 EMB 3368

APPROVED: [Signature]
 DATE: 15-May-09

SCALE: 8.0:1.0
 DWG SIZE: B
 SHEET: 2 OF 2

DRAWING NO. QMA1182A1-001-AT5GP-50
 ITEM NO. 701182AAA42CP5F

FINISH

CAD FILE
 1:QMA10MA1182A1-001-AT5GP-50

CODE ID: 74868
 REV: A

PART NO.

RD-DR 30364 page 2