


NOTES:

1. MATERIALS AND FINISHES:(PLATING THICKNESS IN MICRO-INCHES)  
 BODY - BRASS,ALBALOY PLATING.  
 CONTACT - BERYLLIUM COPPER, GOLD PLATING.  
 INSULATOR - PTFE
2. ELECTRICAL:  
 A. IMPEDANCE: 50 OHM  
 B. FREQUENCY RANGE: DC - 6 GHz  
 C. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS, MIN.
3. MECHANICAL:  
 A. DURABILITY: 100 CYCLES MIN.  
 B. TEMPERATURE RANGE: -40° C TO +85° C


THIRD ANGLE PROJ.

REVISIONS


REV	DESCRIPTION	DATE	ECO	APPR
A	RELEASE TO MFG.	28-Dec-10		RS

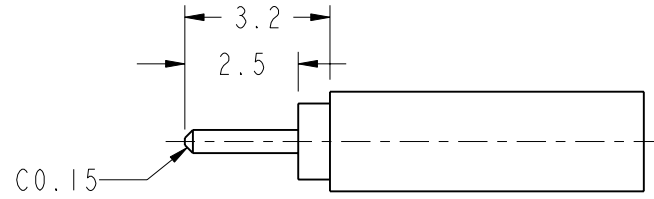


RECOMMENDED  
CABLE STRIPPING DIM'S

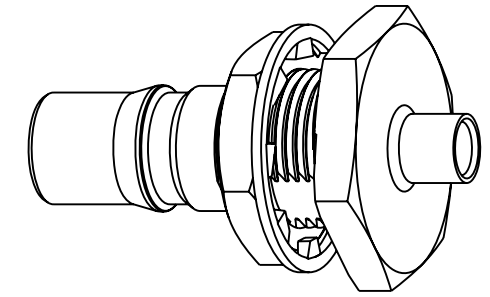

SCALE 3.000

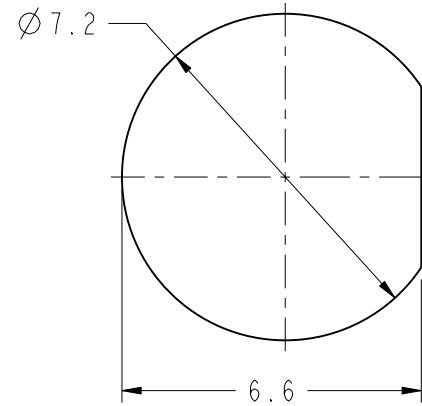

RECOMMENDED  
MOUNTING HOLE

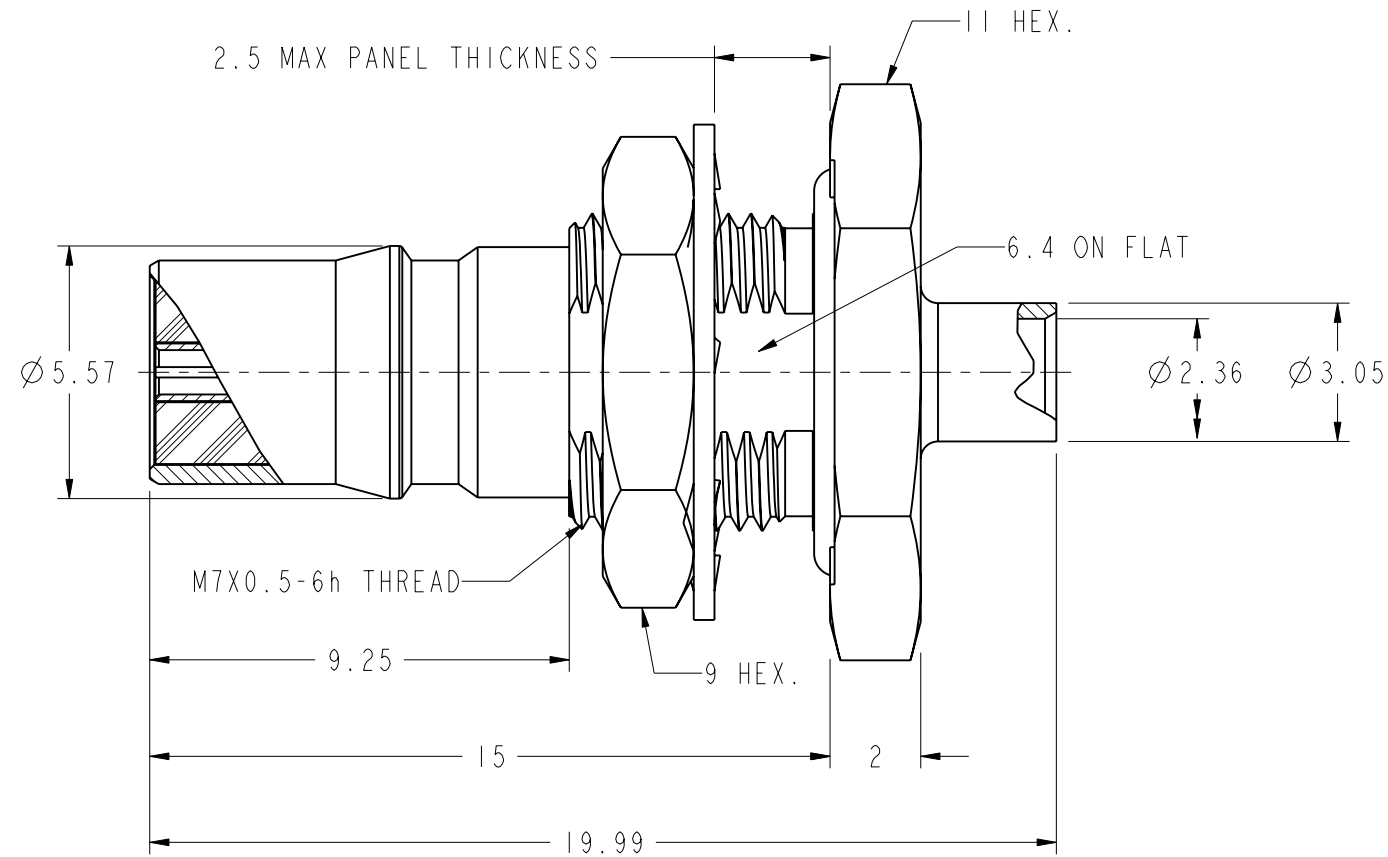

**CUSTOMER OUTLINE DRAWING**

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: 0.5 - 6mm ±0.1mm    6 - 30mm ±0.2mm    30 - 120mm ±0.3mm    ANGLES ±1°  NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The finishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	MATERIAL	DRAWN R. SHANG	DATE 29-Dec-10	TITLE QMA JACK BULKHEAD TO RG-405/SR.086 CABLE		Amphenol RF Danbury CT USA, Tainan, Taiwan, Shenzhen, China www.amphenolrf.com	
	REFERENCE EAR#4131 930-121J-51S	ENGINEER R. CHEN	DATE 29-Dec-10				
	FINISH	APPROVED S. HSIEH	DATE 29-Dec-10	SCALE: 6.0:1.0	SHEET 2 OF 2	ITEM NO. 706481AAB45AG5F	
		CAD FILE I:\QMA\QMA6481A1-001-AT30GA-50		DWG SIZE B	CODE ID 74868	REV A	PART NO.