


REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE

業務部

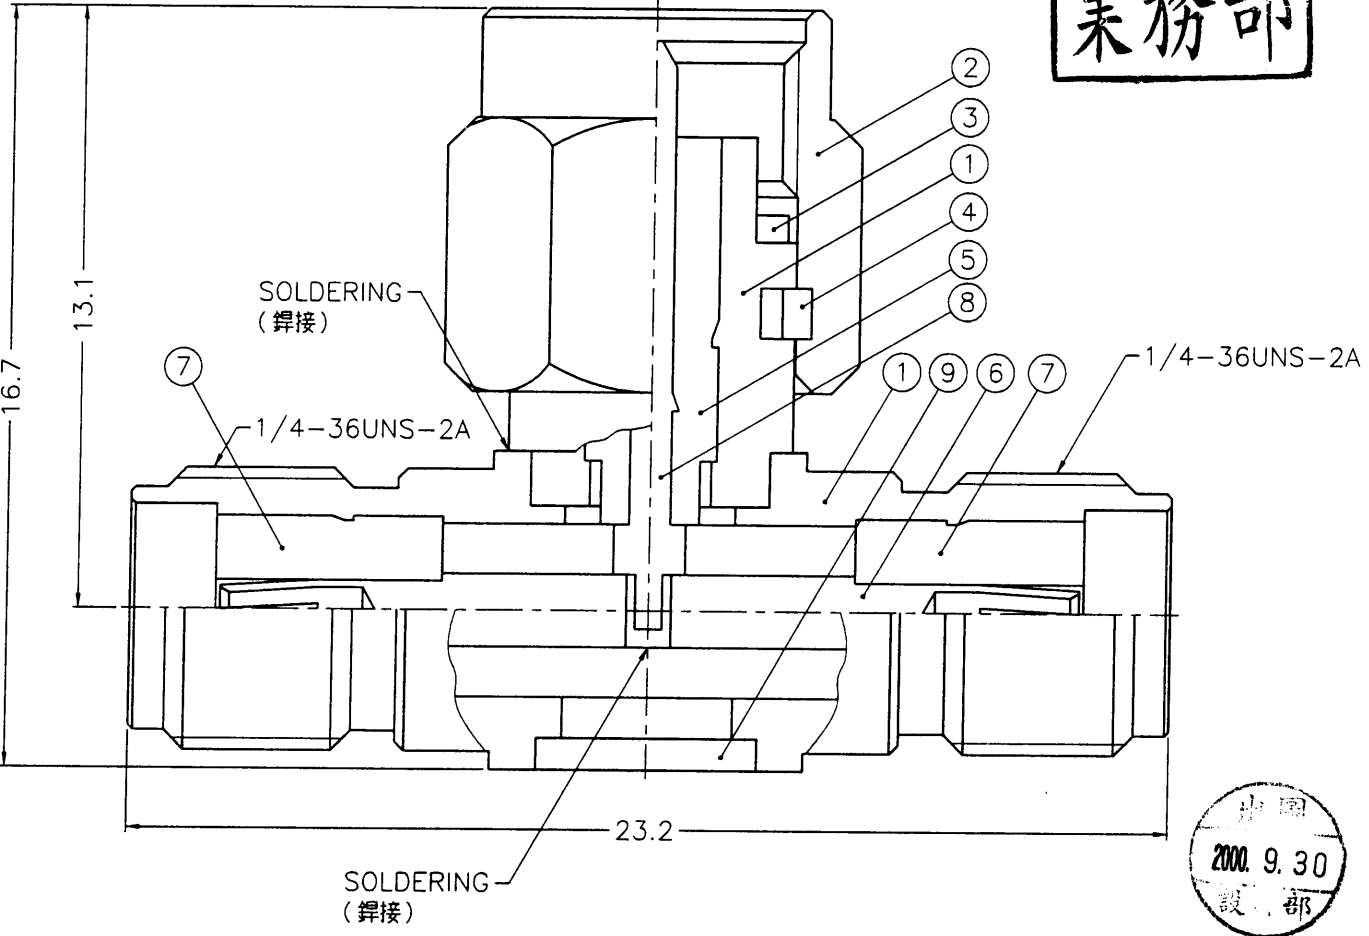

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)  
 1. BRASS PER QQ-B-626  
 2. BRASS PER QQ-B-613  
 3. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE  
 4. BERYLLIUM COPPER PER QQ-C-530  
 5. GOLD PL. 50 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE  
 6. TEFLON MIL-P-19468

9	COVER	NOTE 2	NOTE 3	1	CV-5X05-T
8	CONTACT PIN	NOTE 1	NOTE 5	1	SMA9073A1-8
7	INSULATOR	NOTE 6	NATURAL	2	SMA7071A2-2T-50-B
6	CONTACT PIN	NOTE 4	NOTE 5	1	SMA8073A1-4
5	INSULATOR	NOTE 6	NATURAL	1	SMA1112A3-3T-50
4	RETAINER RING	NOTE 4	NATURAL	1	SMA5000-4-B
3	GASKET	SILICONE	RED	1	GS-6/43X06
2	SHELL	NOTE 1	NOTE 3	1	SMA5000-1-C
1	HOUSING WITH BODY	NOTE 1	NOTE 3	1	SMA9073A1-1S

DIMENSIONS ARE IN MILLIMETERS			PART NO.	
UNLESS OTHERWISE SPECIFIED TOLERANCES			APPROVED	DATE
0.5-6	= ±0.2		<i>A. W. C.</i>	09-29-00'
6-30	= ±0.4		CHECKED	DATE
30-120	= ±0.6		<i>Staly. w</i>	09-29-00'
120-315	= ±1		DRAWN	DATE
315-1000	= ±1.6		<i>Gene L</i>	09-29-00'
1000-2000	= ±2.4			

Amphenol - Kai Jack	
TAINAN TAIWAN	
TITLE	SMA "T" ADAPTOR JACK-PLUG-JACK
DRAWING NO.	KJ-SMA9073A1-3GT50G-50
FILE NO.	F:\DWG\SMA\9073A1\50\3GT50G