




1 2 3 4 5 6 7 8

REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE


業務部

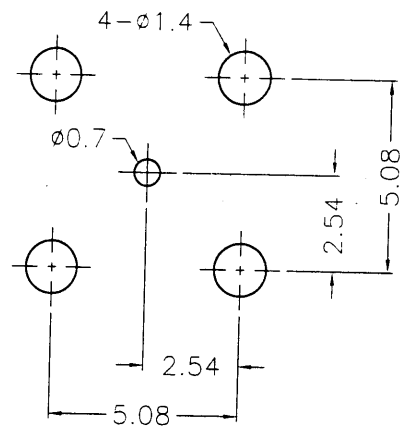

PCB MOUNTING HOLES

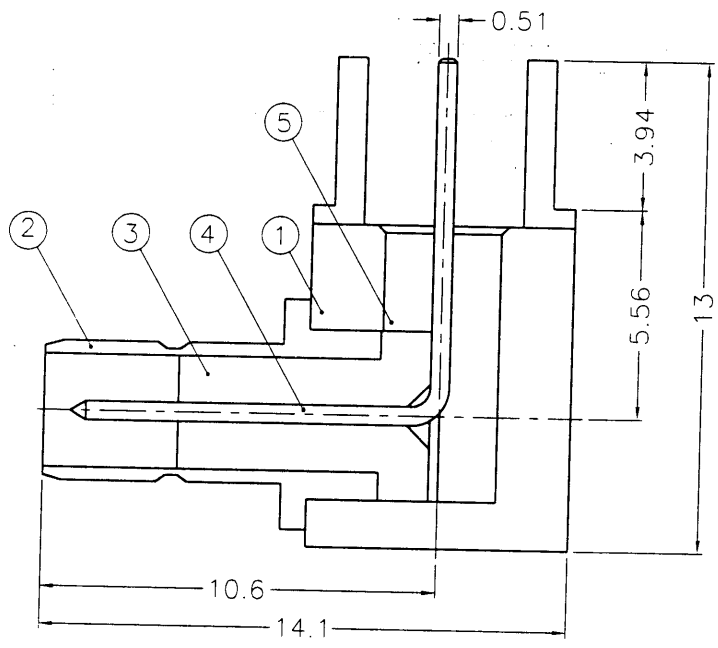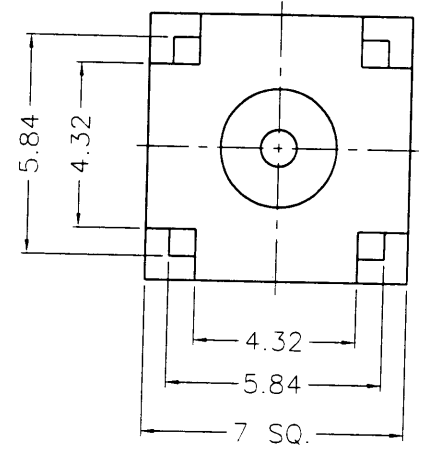

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
- BRASS PER QQ-B-626
  - GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
  - GOLD PL. 30 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
  - TEFLON MIL-P-19468



NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
5	INSULATOR	NOTE 4	NATURAL	1	SMB1252M1-5T-75
4	CONTACT PIN	NOTE 1	NOTE 3	1	SMB1252M1-4
3	INSULATOR	NOTE 4	NATURAL	1	SMB1252M1-3T-75
2	BODY	NOTE 1	NOTE 2	1	SMB7790-2-A
1	HOUSING	NOTE 1	NOTE 2	1	SMB1252M1-1

DIMENSIONS ARE IN MILLIMETERS			
UNLESS OTHERWISE SPECIFIED TOLERANCES			
0.5-6	=	±0.2	
6-30	=	±0.4	
30-120	=	±0.6	
120-315	=	±1	
315-1000	=	±1.6	
1000-2000	=	±2.4	

PART NO.	
APPROVED	DATE
CHECKED	DATE
DRAWN	DATE

	<b>KAI JACK INDUSTRIAL CO., LTD.</b> TAINAN TAIWAN R.O.C.
	TITLE
MINI 75 OHM SMB R/A P.C.B. JACK	
DRAWING NO.	
KJ-SMB1252M1-3GT30G-75	
FILE NO. F:\DWG\SMB\1252M1\75\3GT30G	

A

1 2 3 4 5 6 7 8

SMB Robbo