
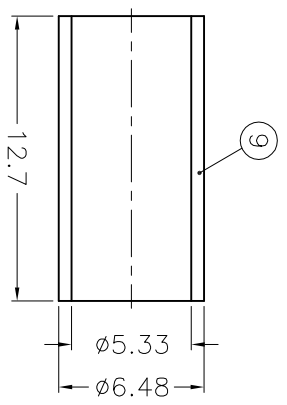
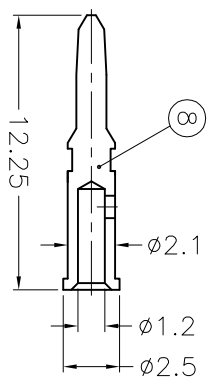
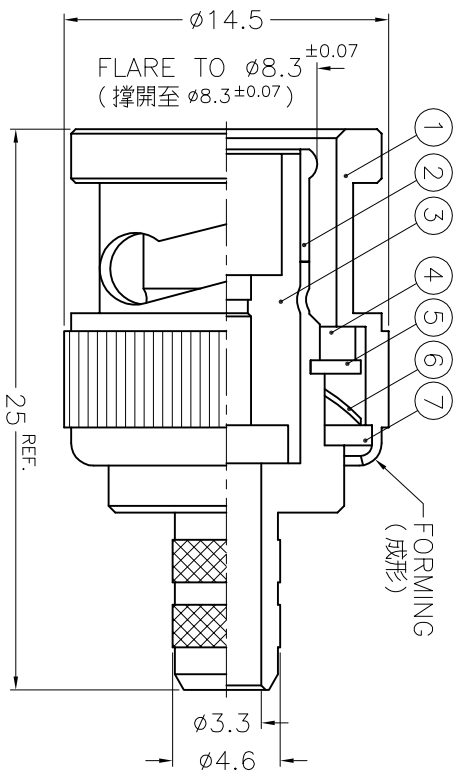


ISS	ZONE	DESCRIPTION \ PER REQUEST \ DATE
B	B-1	NO.9 WAS CHANGED \ RD--DM89083101 \ (08--31--00'

REVISIONS

1 2 3 4 5 6 7 8

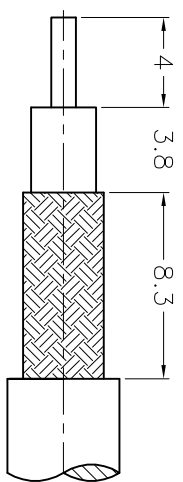

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. BRASS PER QQ-B-613
3. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
4. NICKEL PL. 200 MIN. THICK OVER COPPER STRIKE
5. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
6. TEFLON MIL-P-19468

1. CRIMPED FERRULE
2. CRIMPED CONTACT PIN
3. CRIMPED CONTACT PIN
4. HEX CRIMP SIZE .068"

9	FERRULE	COPPER	NOTE 3	1	FR-648/533X127C
8	CONTACT PIN	NOTE 1	NOTE 5	1	B1121AA-8-25/12
7	WASHER	NOTE 2	NOTE 3	1	WS-128/9X08
6	SPRING	SKS	NOTE 4	1	B50000-6
5	RETAINER RING	NOTE 1	NOTE 3	1	B50000-5
4	GASKET	RUBBER	RED	1	GS-115/8X15
3	INSULATOR	NOTE 5	NATURAL	1	B50000-3T-50
2	BODY	NOTE 1	NOTE 3	1	B50000-2-46/33
1	SHELL	NOTE 1	NOTE 3	1	B50000-1-B
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS	
UNLESS OTHERWISE SPECIFIED TOLERANCES	
0.5-6	= ± 0.2
6-30	= ± 0.4
30-120	= ± 0.6
120-315	= ± 1
315-1000	= ± 1.6
1000-2000	= ± 2.4
SCALE	3/1
ISSUE	B

PART NO.	
APPROVED	DATE
CHECKED	DATE
DRAWN	DATE

TITLE	
Amphenol - Kai Jack	
TAINAN TAIWAN	
BNC CRIMP PLUG	
DRAWING NO.	KJ-B1121AA-NT3G-LMR200-50
FILE NO.	F:\DWG\B\1121AA\LMR200-50\NT3G

A

B

C

D

E

F

A

B

C

D

E

F

1 2 3 4 5 6 7 8