



1 2 3 4 5 6 7 8

REVISIONS		
ISS	ZONE	DESCRIPTION\APPROVED\DATE
B	A-1	DRAWING NO. WERE CHANGED ON NO.2, NO.4, NO.6
	B-1	AND NO.9\TONY. T\09-23-96'

業務部

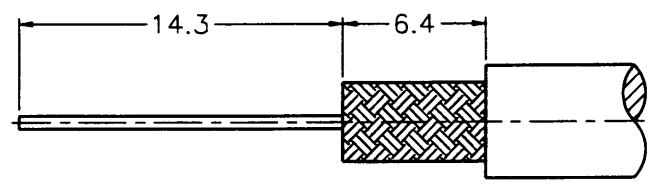

RECOMMENDED  
CABLE STRIPPING DIM'S

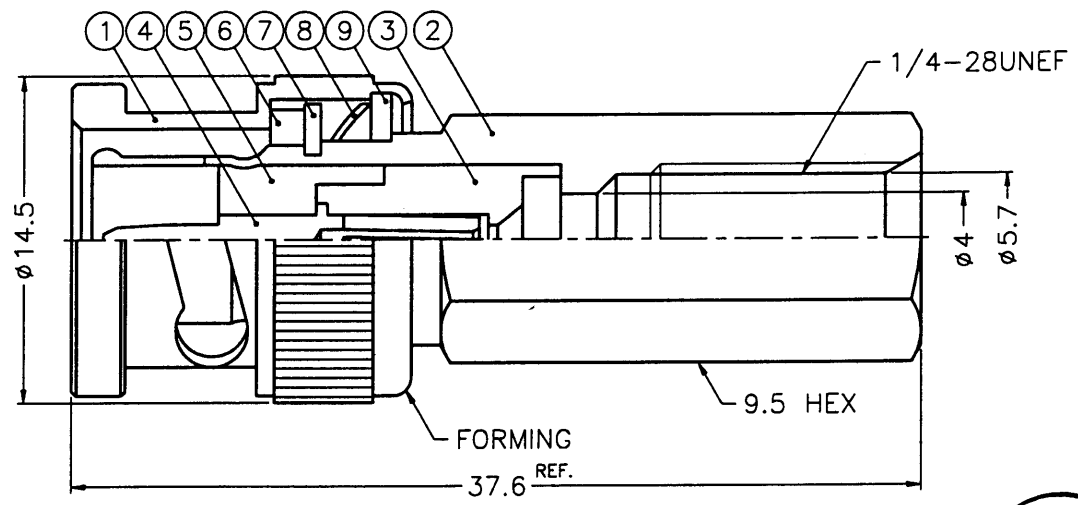

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
- BRASS PER QQ-B-626, ALLOY 360, 1/2 H
  - BRASS PER QQ-B-613, COMP 260, HARD TEMP
  - NICKEL PL. 100 MIN. OVER COPPER PL. 50 MIN.  
SILVER PL. 80 MIN. OVER COPPER PL. 50 MIN.
  - GOLD PL. MIN. OVER NICKEL PL. 50 MIN.  
OVER COPPER PL. 50 MIN.  
SILVER PL. 100 MIN. OVER NICKEL PL. 50 MIN.  
OVER COPPER PL. 50 MIN.

出圖  
3.31  
R&D

出圖  
86.3.31  
R&D

9	WASHER	NOTE 2	NOTE 3	1	WS-128/9X08
8	SPRING	SK5	NOTE 3	1	B50000-6
7	RETAINER RING	NOTE 1	NOTE 3	1	B50000-5
6	GASKET	RUBBER	RED	1	GS-115/8X15
5	INSULATOR	DELTRIN	NATURAL	1	B5100-5-75
4	CONTACT PIN	NOTE 1	NOTE 4	1	B5100-4-21/076
3	INSULATOR	DELTRIN	NATURAL	1	B5100-3-50
2	HEX BODY	NOTE 1	NOTE 3	1	B5100-2-57/4
1	SHELL	NOTE 1	NOTE 3	1	B50000-1-B
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS  
UNLESS OTHERWISE SPECIFIED  
TOLERANCES  
0.5-6 = ±0.2  
6-30 = ±0.4  
30-120 = ±0.6  
120-315 = ±1  
315-1000 = ±1.6  
1000-2000 = ±2.4

PART NO.	
APPROVED	DATE 03-28-97'
CHECKED	DATE 03-28-97'
DRAWN	DATE 03-28-97'

KAI JACK INDUSTRIAL CO., LTD. TAINAN TAIWAN R.O.C.	
TITLE	BNC TWIST-ON PLUG
DRAWING NO.	KJ-B1131A1-59U-75
FILE NO.	F:\DWG\B\1131A1\59U-75

B

A

1 2 3 4 5 6 7 8 B-R3849