



業務部



- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626, ALLOY 360, 1/2 H
  2. NICKEL PL. 100 MIN. OVER COPPER PL. 50 MIN. SILVER PL. 80 MIN. OVER COPPER PL. 50 MIN.
  3. PHOSPHOR BRONZE PER QQ-B-750, COMP A, 1/2 H
  4. GOLD PL. MIN. OVER NICKEL PL. 50 MIN. OVER COPPER PL. 50 MIN. SILVER PL. 100 MIN. OVER NICKEL PL. 50 MIN. OVER COPPER PL. 50 MIN.
  5. DELRIN 500F (B7996ZZ-3-75) TEFLON MIL-P-19468 (B7996ZZ-3T-75)

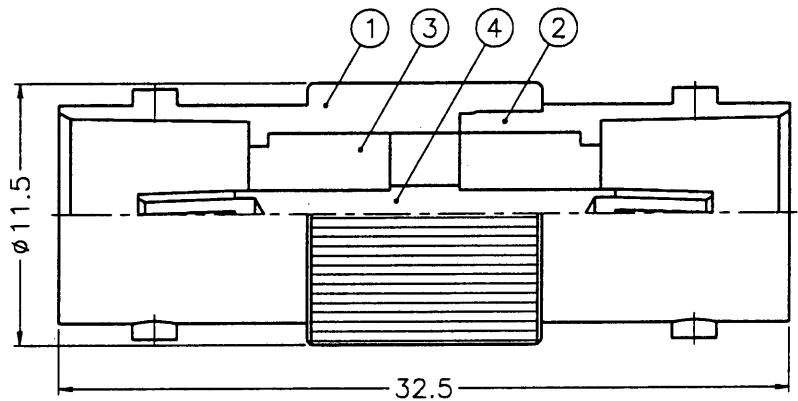

DIMENSIONS ARE IN MILLIMETERS				PART NO.		 <b>KAI JACK INDUSTRIAL CO., LTD.</b> TAINAN TAIWAN R.O.C.	
UNLESS OTHERWISE SPECIFIED TOLERANCES				APPROVED	DATE		TITLE
0.5-6 = ±0.2				<i>Mark. C</i>	10-14-95'		BNC FEMALE TO FEMALE ADAPTOR
6-30 = ±0.4							CHECKED
30-120 = ±0.6				<i>Mark. C</i>	10-14-95'	KJ-B7071A2-75	
120-315 = ±1						DRAWN	DATE
315-1000 = ±1.6				<i>Skaly. w</i>	10-14-95'	F:\DWG\B\7071A2\75	
1000-2000 = ±2.4							

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
4	CONTACT PIN	NOTE 3	NOTE 4	1	B7900-4
3	INSULATOR	NOTE 5	NATURAL	2	NOTE 5
2	BODY	NOTE 1	NOTE 2	1	B74000-2
1	HOUSING	NOTE 1	NOTE 2	1	B7901-1

0-22685