

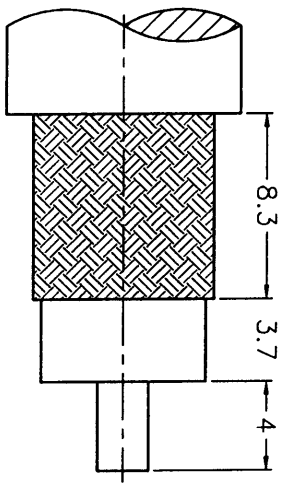
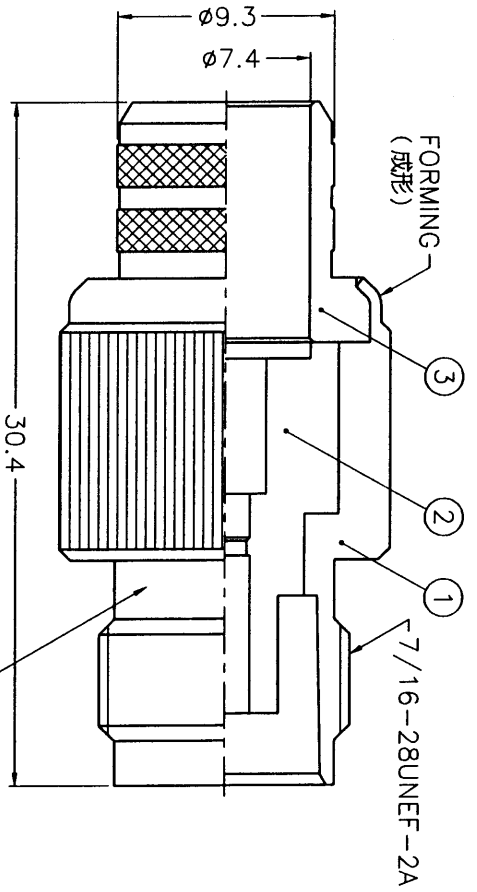


ISS	ZONE	DESCRIPTION\PER REQUEST\DATE
-----	------	------------------------------

REVISIONS

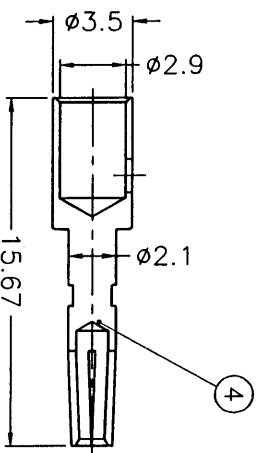

業務部

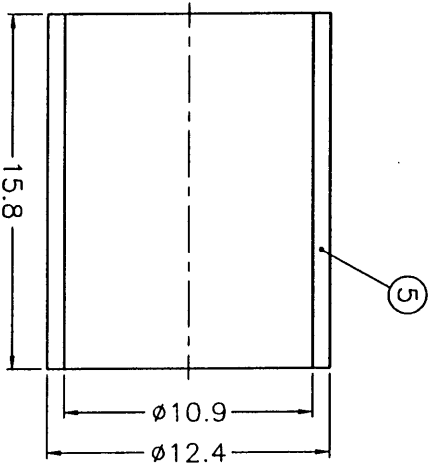

STAMP (IF ANY)
噴字 (若有要求)

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER 00-B-626
 2. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 3. PHOSPHOR BRONZE PER 00-B-750
 4. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 5. TEFLON MIL-P-19468
 6. JIS H 3250, C 2700

出國
2001.3.20
設計

1. CRIMPED FERRULE
HEX CRIMP SIZE .429"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .118"

5	FERRULE	NOTE 6	NOTE 2	1	FR-124/109X158
4	CONTACT PIN	NOTE 3	NOTE 4	1	B6121A6-4-35/ 29
3	BARREL	NOTE 1	NOTE 2	1	NS000-3-93/74
2	INSULATOR	NOTE 5	NATURAL	1	B6121A6-2T-50 -9913
1	BODY	NOTE 1	NOTE 2	1	T6121A6-1

DIMENSIONS ARE IN MILLIMETERS	
UNLESS OTHERWISE SPECIFIED	TOLERANCES
0.5-6	= ±0.2
6-30	= ±0.4
30-120	= ±0.6
120-315	= ±1
315-1000	= ±1.6
1000-2000	= ±2.4

PART NO.	
APPROVED	DATE 03-19-01'
CHECKED	DATE 03-19-01'
DRAWN	DATE 03-19-01'

TITLE	TNC CRIMP JACK (FOR BELDEN 8214 ,9913 ,9914)
DRAWING NO.	KJ-T6121A6-NT3G-9913-50
FILE NO.	F:\DWG\T\6121A6\9913-50\NT3G

Amphenol-Kai Jack
TAINAN TAIWAN

1 2 3 4 5 6 7 8

RD-BDR/1853